
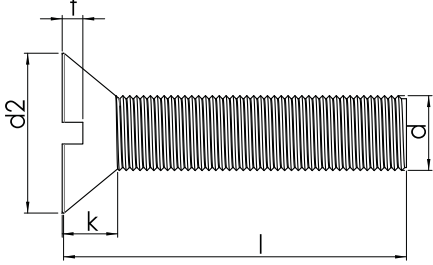


DIN 963 EN ISO 2009**METRİK HAVŞA BAŞLI VİDALAR****COUNTERSUNK HEAD METRIC SCREW****SENKSCHRAUBE MIT SCHLITZ****Technical Informations / Teknik Bilgiler**

Thread size / Anma çapı (d)		M2	M2.5	M3	M4	M5	M6	M8	M10
Head height / Kafa yüksekliği	max.	1,20	1,50	1,65	2,20	2,50	3,00	4,00	5,00
Head dia / Kafa çapı	d ₂	3,50	4,40	5,30	7,80	8,84	10,57	14,07	17,57
	max.	3,80	4,70	5,60	7,14	9,20	11,00	14,50	18,00
	Nominal size	0,50	0,60	0,80	1,00	1,20	1,80	2,00	2,50
Socket width / Yarı genişliği	min.	0,56	0,66	0,86	1,06	1,26	1,66	2,06	2,56
	max.	0,70	0,80	1,00	1,20	1,51	1,91	2,31	2,81
Slot depth / Yarı derinliği	t	0,40	0,50	0,60	0,80	1,00	1,20	1,60	2,00
	max	0,60	0,70	0,85	1,10	1,30	1,60	2,10	2,60

Thread size / Anma çapı (d)		M2	M2.5	M3	M4	M5	M6	M8	M10
Length / Boy (l)	min.								
	max								
5	4,75	5,25	0,14	0,24	0,34	0,676			
6	5,75	6,25	0,15	0,27	0,38	0,74	1,21		
8	7,70	8,30	0,19	0,33	0,47	0,91	1,45	2,19	
10	9,70	10,30	0,23	0,39	0,56	1,06	1,70	2,54	5,03
12	11,65	12,35	0,27	0,45	0,64	1,22	1,95	2,89	5,67
16	15,65	16,35	0,34	0,57	0,82	1,53	2,44	3,61	6,94
20	19,60	20,40		0,69	1,00	1,84	2,94	4,31	8,21
25	24,60	25,40		0,84	1,22	2,22	3,55	5,19	9,79
30	29,60	30,40			1,44	2,61	4,16	6,08	11,4
35	34,50	35,50				3,00	4,76	6,96	13,00
40	39,50	40,50				3,38	5,39	7,84	14,6
45	44,50	45,50					6,02	8,73	16,2
50	49,50	50,50					6,65	9,61	17,8
55	54,00	56,00							19,4
60	59,00	61,00							33,7

Values are given in millimeters. / Değerler milimetre olarak verilmiştir.