


**POLİÜRETAN PANEL VİDASI 6 mm.**  
**COMPOSITE PANEL SELF DRILLING SCREW**  
**SELBSTBOHRENDE PANEEL SCHRAUBE**

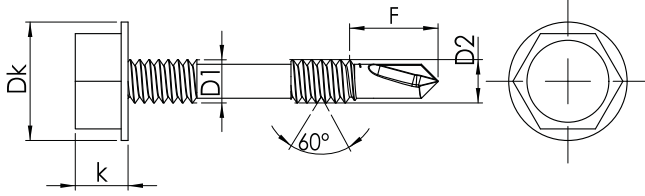


**Technical Informations / Teknik Bilgiler**

<b>Thread size / Anma çapı (d)</b>			<b>5,5-14</b>
<b>Head heigth / Kafa yüksekliği</b>	<b>k</b>	<b>min.</b>	5,15
		<b>max.</b>	5,45
<b>Head width / Anahtar ağzı</b>	<b>s</b>	<b>min.</b>	7,78
		<b>max.</b>	8,00
<b>Drilling point length/Matkap uç uzunluğu F</b>		<b>min.</b>	6,00
		<b>max.</b>	7,00
<b>Major Dia / Diş üstü çapı</b>		<b>min.</b>	5,20
		<b>max.</b>	5,45
<b>Material / Malzeme</b>			1022A

<b>Thread size / Anma çapı (d)</b>			<b>5,5-14</b>
<b>Length / Boy (l)</b>			<b>Weight / Ağırlık gr/p</b>
	<b>min.</b>	<b>max.</b>	
<b>66</b>	64,8	67,00	11,48
<b>76</b>	74,8	78,00	12,68
<b>90</b>	88,5	91,00	14,35
<b>105</b>	103,5	106,00	14,64
<b>120</b>	118,5	120,00	17,63
<b>130</b>	128,5	130,00	19,20

Values are given in millimeters. / Değerler milimetre olarak verilmiştir.

**POLİÜRETAN PANEL VİDASI 12 mm.**  
**COMPOSITE PANEL SELF DRILLING SCREW**  
**SELBSTBOHRENDE PANEEL SCHRAUBE**

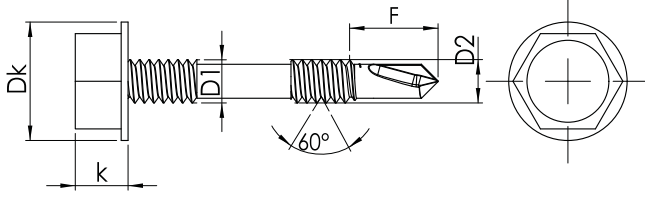

**Technical Informations / Teknik Bilgiler**

Thread size / Anma çapı (d)			<b>5,5-24</b>
Head height / kafa yüksekliği	k	min.	5,15
		max.	5,45
Head width / Anahtar ağızı	s	min.	7,78
		max.	8,000
Drilling point length / Matkap uç uzunluğu	F	min.	14,00
		max.	15,00
Major Dia / Diş üstü çapı		min.	5,20
		max.	5,45
Material / Malzeme			1022A

Thread size / Anma çapı (d)			<b>5,5-24</b>
Length / Boy (l)			<b>Weight / Ağırlık gr/p</b>
	min.	max.	
32	31	33	8,42
50	49	51	9,40
60	58,5	61	10,50
66	64,8	67	11,48
76	74,8	78	12,68
90	88,5	91	14,35
105	103,5	108	16,87
120	118,5	121	18,91
135	133,5	136	20,96

Values are given in millimeters. / Değerler milimetre olarak verilmiştir.